Heat Shrink Tubings

Dual Wall Heat Shrink Tube Black

Temperature ranges:-55℃~125℃.

Shrinking temperature 70℃

Shrunk totally at 110℃.

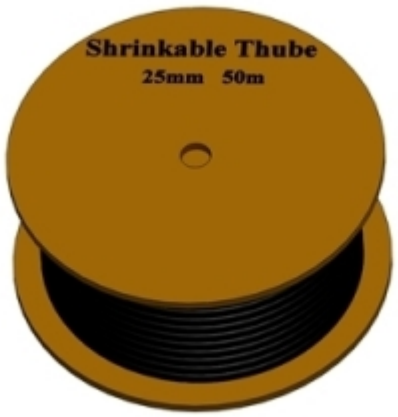

Longitudinal shrinking

a) Ø0.6~Ø 6.0 less than±5%

b) Ø 6.0~Ø 30.0 less than ±8%

c) Ø30.0~Ø 50.0 less than±10%

d) Ø60.0 less than ±15%

Heat Resistance:

250℃x4hr No Cracking.

Standard for Extruded Electrical Tubing UL 224.

Kiryat Sharet, Holon P.o.Box 5528

Phone: +972 3 5596755

Mail: scr_ltd@bezeqint.net

WEB: www.scrltd.com