Male



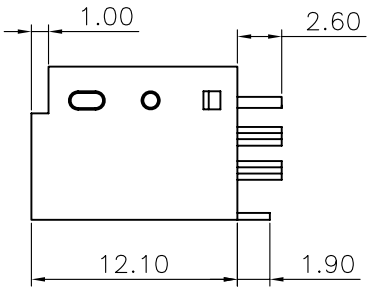

NOTES:

1. SPECIFICATIONS:
   - 1.0 VOLTAGE RATING: 30V DC.
   - 1.1 CONTACT CURRENT RATING: 1A MAX. PER PIN.
   - 1.2 CONTACT RESISTANCE: 30 mΩ MAX.
   - 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   - 1.4 INSULATION RESISTANCE: 1000 MΩ MIN.
   - 1.5 OPERATING TEMPERATURE: −40°C~+105°C.

Female



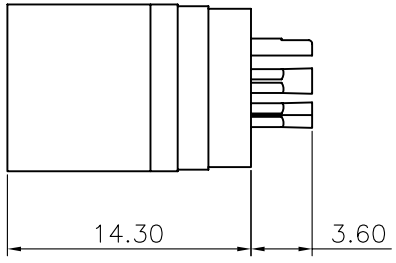


4 PIN


5 PIN


7 PIN


8 PIN

OTHER PINS FIGURE

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60 .X ±0.38 .XX ±0.25	X. ±5° .X ±3° .XX ±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	MINI DIN TYPE
UNITS	mm		
SHEET SIZE	A4	SERIES	