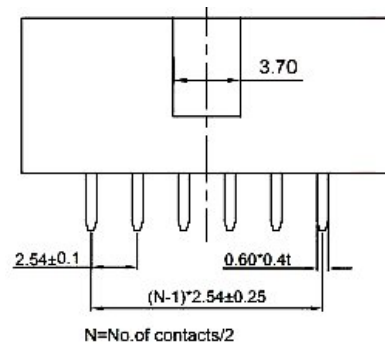
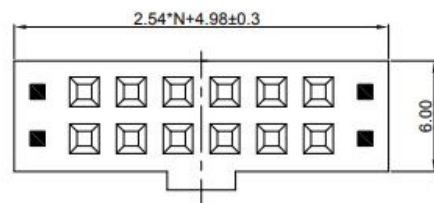
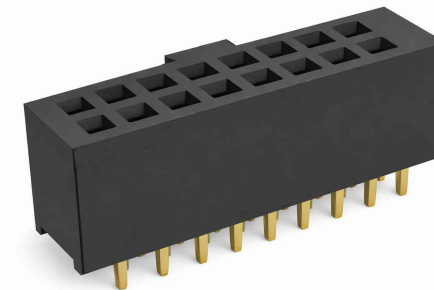


FKD2

No of contact
2x2-2x40

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
4. Current Rating: 3A.
5. Temperature: -40 °C to +105 °C

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Materials: PBT, Black, UL94-V0.

AUK A MEMBER OF AUK GROUP
太聯華業股份有限公司
AUK CONTRACTORS CO., LTD.

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X .XX AWG.	CATEGORY		APPROVED BY	
	PART No. FKD2		CHECKED BY	
	DRAWING No.		DRAWING BY HXY	
	SCALE	NONE	REV.	A

AREA	REVISIONS	CHK	DATE
------	-----------	-----	------

