

Circular Connector Male MIC-8MB6H

Specifications and Materials

Specifications:

1. Contact Resistance: 5m Ω Max.
2. Insulation Resistance: 500M Ω Min.
3. Dielectric Withstanding Voltage: 1000V AC(rms) For 1 Minute.
4. Current Rating: 5-15A.
5. Temperature: -40°C ~ +105°C.

Materials:



1. Contact Material: Copper Alloy.
2. Contact Plating: Silver Plating Over Nickel.

Insulator Material: Plastic, Black or White





SCR
components

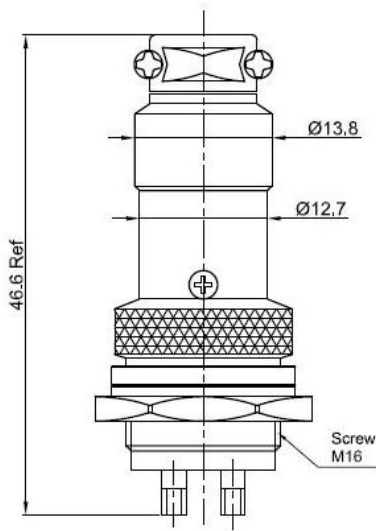

Panel Hole layout

