Circular Connector Female MIC-02FB6-H

Specifications and Materials

Specifications:

1. Contact Resistance: 5mΩ Max.
2. Insulation Resistance: 500MΩ Min.
3. Dielectric Withstanding Voltage: 1000V AC(rms) For 1 Minute.
4. Current Rating: 5-15A.
5. Temperature: -40°C ~ +105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Silver Plating Over Nickel.

Insulator Material: Plastic, Black or White

SCR ELECTRONICS LTD

T:+972 35596755 F:+972 35596212 E: info@scrltd.com W: www.scrltd.com

SCR components

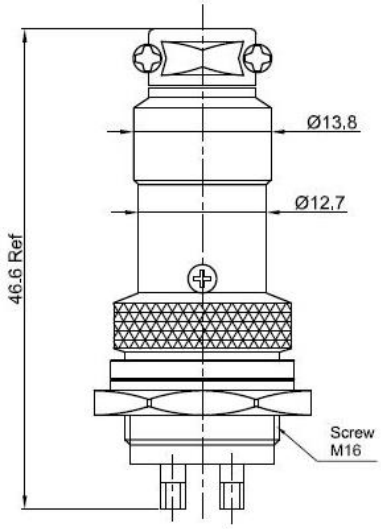



Panel Hole layout

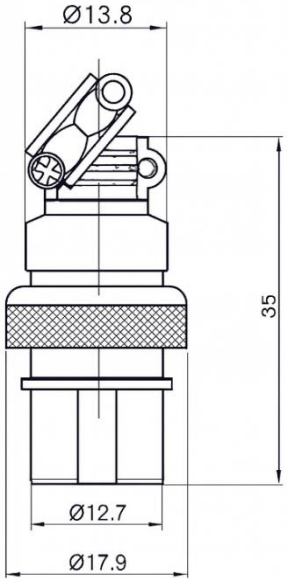



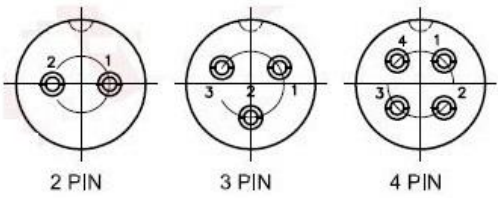

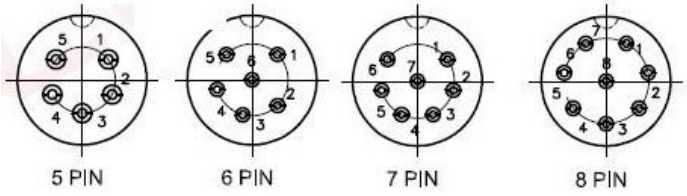

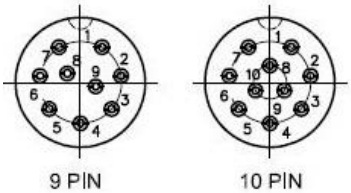

SCR ELECTRONICS LTD

T:+972 35596755 F:+972 35596212 E: info@scrltd.com W: www.scrltd.com