

## Circular Connector Female MIC02-6FB6-H

### Specifications:



1. Contact Resistance: 5m $\Omega$  Max.
2. Insulation Resistance: 500M $\Omega$  Min.
3. Dielectric Withstanding Voltage: 1000V AC(rms) For 1 Minute.
4. Current Rating: 5A.
5. Temperature: -40°C ~ +105°C.

### Materials:


1. Contact Material: Copper Alloy.
2. Contact Plating: Silver Plating Over Nickel.

Insulator Material: Plastic, Black.




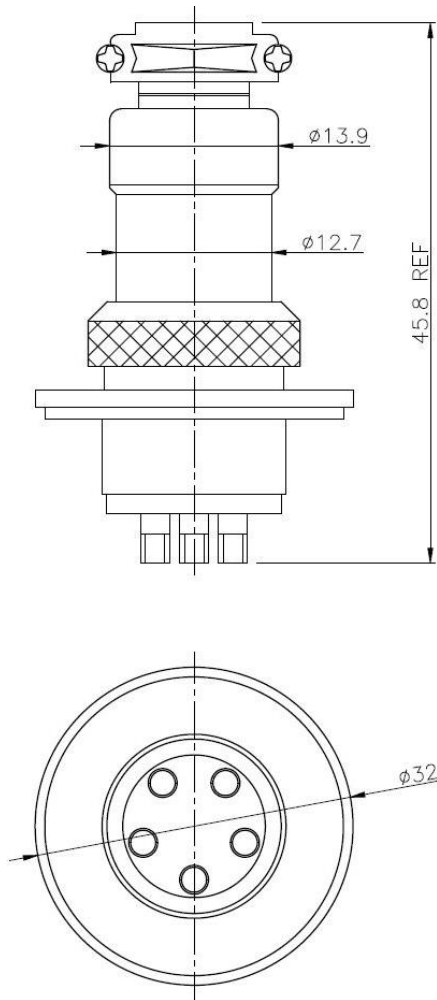


2 PIN




3 PIN




4 PIN




5 PIN




6 PIN




7 PIN



8 PIN



9 PIN



10 PIN