


Circular Connector Male MIC03-3MB6H

Specification

1. Current Rating: 5A ~ 10A.
2. Dielectric Withstanding Voltage: 1000V (AC).
3. Contact Resistance: 20m Ω Max.
4. Insulation Resistance: 1000M Ω (DC) Min.




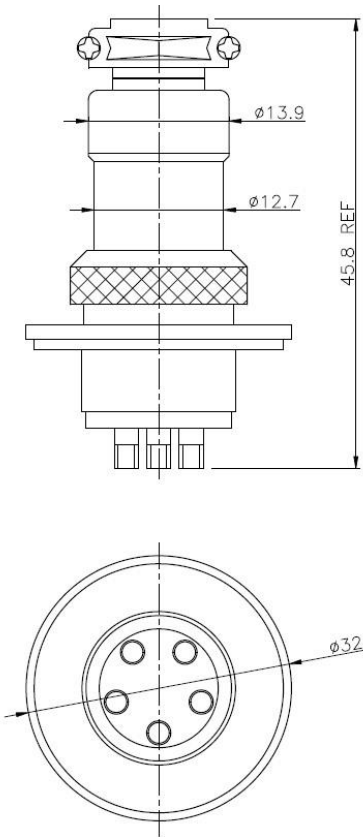

2 PIN($\phi 3$ 10A)



3 PIN($\phi 3$ 7A)



4 PIN($\phi 3$ 7A)



5 PIN($\phi 3$ 7A)



6 PIN($\phi 2$ 5A)



7 PIN($\phi 2$ 5A)



8 PIN($\phi 1.5$ 5A)



10 PIN($\phi 1.5$ 5A)



12 PIN($\phi 1.5$ 5A)



14 PIN($\phi 1.5$ 5A)