

Circular Connector Male MIC03-4MB6H



Specification

1. Current Rating: 5A ~ 10A.
2. Dielectric Withstanding Voltage: 1000V (AC).
3. Contact Resistance: 20mΩ Max.
4. Insulation Resistance: 1000MΩ (DC) Min.





SCR
components

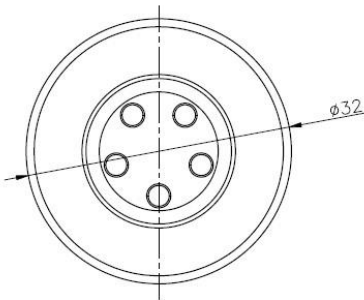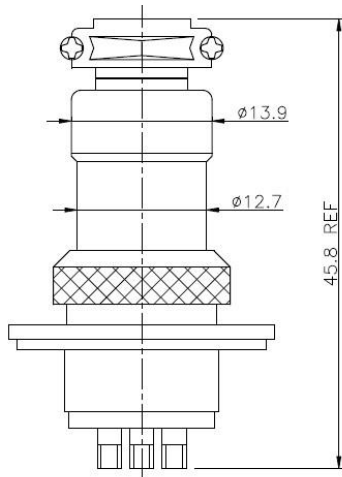

SCR ELECTRONICS LTD



2 PIN(ø3 10A)



3 PIN(ø3 7A)



4 PIN(ø3 7A)



5 PIN(ø3 7A)



6 PIN(ø2 5A)



7 PIN(ø2 5A)



8 PIN(ø1.5 5A)



10 PIN(ø1.5 5A)



12 PIN(ø1.5 5A)



14 PIN(ø1.5 5A)