




Circular Connector Male MIC06-7MLYP-H

1. Current Rating: 5A Max.
2. Dielectric Withstanding Voltage: 500V (AC).
3. Contact Resistance: 100m Ω Max.
4. Insulation Resistance: 1000M Ω DC) Min.




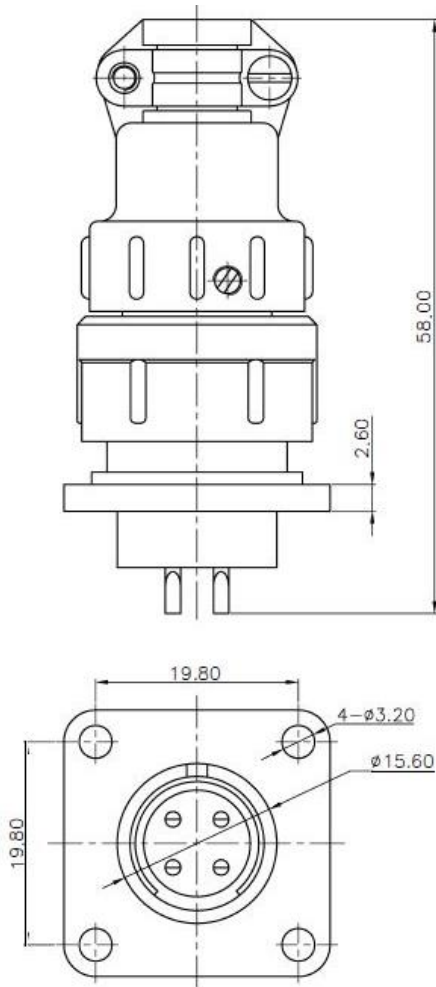


3pin




4pin



5pin



7pin



9pin