

△ SPECIFICATION

Voltage Rating:125V AC RMS
Current Rating:1.5 Amp
Dielectric Strength:1000V AC RMS 60Hz 1 Minute
Contact Resistance:35 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. @500V DC
Operation Temperature:-40°C~+85°C
Storage Temperature:-10°C~+40°C

Relative Humidity:<80%

Mating/Unmating Force:22N/2.27kg Max.

Retention Strength:57.83N Min.

Operating Life:750 Cycles Min.

△ Housing:PBT(UL94V-0),Black

Contact:Phosphor Bronze,Ø0.46mm

Mates With Modular Plug Conforming To

FCC Part 68,Subpart F.

RoHS Compliant

△ MJ D 0604 K E XX - H
△ (1) (2) (3) (4) (5) (6) (7)

(1) MJ:Modular Jack

(2) D:DIP Straight

(3) 0604:6P4C

(4) K:Insulator Color Black

(5) E:With Panel Stop

(6) XX:Contact Finish






01:Gold Flash Over Nickel

06:Gold Plated 6u" Over Nickel

15:Gold Plated 15u" Over Nickel

30:Gold Plated 30u" Over Nickel

(7) H:RoHS Compliant

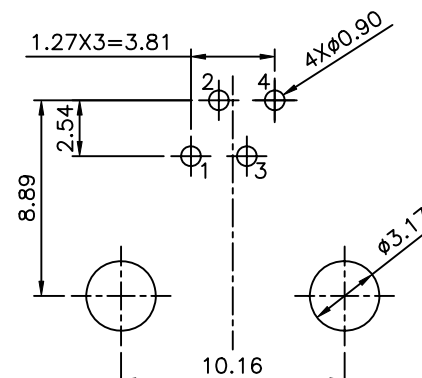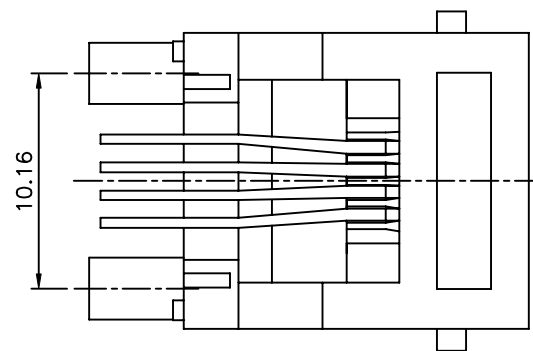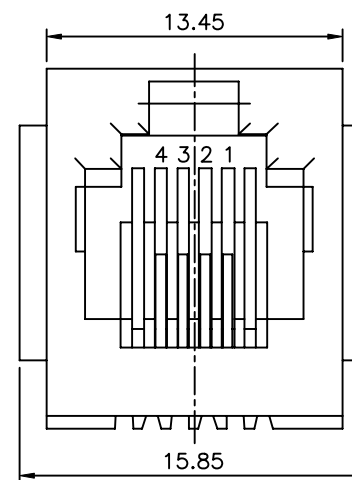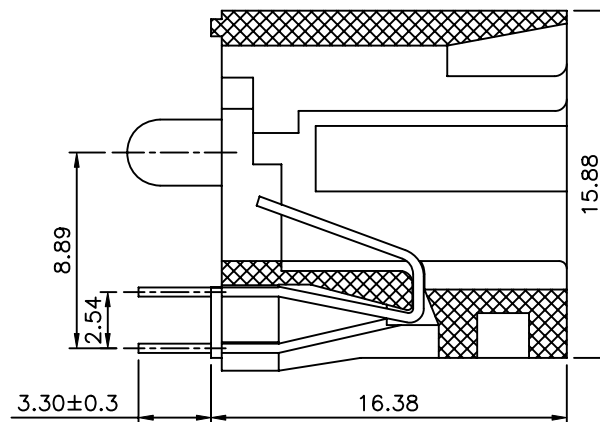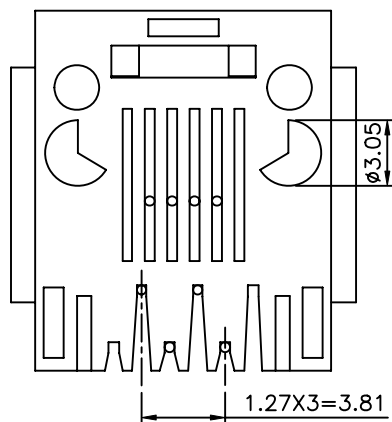

△ Recommended P.C.B. Layout
(Thickness=1.6mm)



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
PART No.	MJD0604KEXX-H	CHECKED BY	MEI					
DRAWING No.	MJD0604KEXX-H	DRAWING BY	HZF	0~15 ±0.15 15~30 ±0.20 30~ ANG. ±0.25 ±1°				
SCALE	NONE	REV.	A2	UNIT mm				
					NO.	REV.	REVISIONS	DATE
					△ A2		Modify Data	HZF 04/14/2011
					△ A1		Modify Data	HZF 11/30/2009
					△ A0		NEW RELEASE	HZF 10/05/2007