

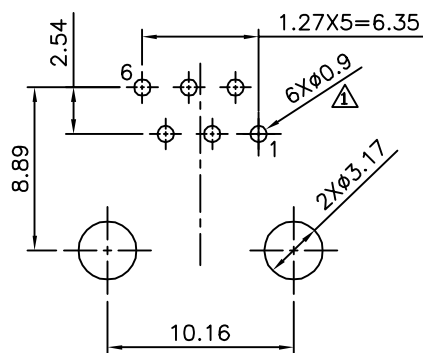
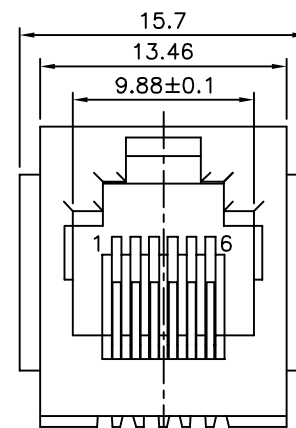
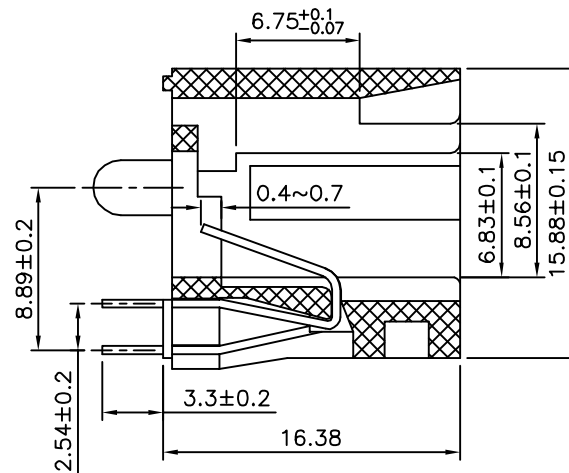


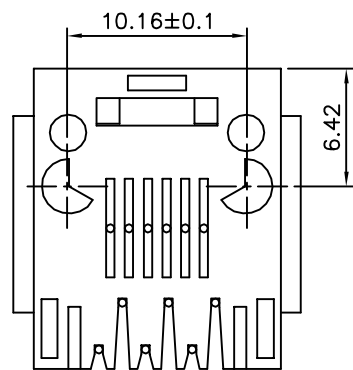

Recommended P.C.B. Layout

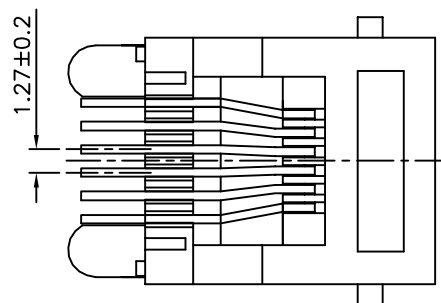

△△ SPECIFICATION

Voltage Rating:125V AC RMS
 Current Rating:1.5 Amp
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. @ 500V DC
 Dielectric Strength:1000V AC Or 1500V DC RMS
 At 0.5mA 50 Hz Or 60 Hz For 1 Minute
 Mating/Unmating Force:30N/3.06kg Max.
 Retention Strength:50N For 60S±5S
 Operating Life:750 Cycles Min.
 Storage Temperature:-40°C~+85°C
 Relative Humidity<80%
 Operation Temperature:-40°C~+85°C
 Housing&Insert:PBT(UL94V-0),Black
 Contact:Phosphor Bronze,Ø0.46mm
 Mates With Modular Plug Conforming To FCC Part 68,
 Subpart F.
 RoHS Compliant

△ MJ D 0606 K E XX - H
 (1) (2) (3) (4) (5) (6) (7)

- (1) MJ:Modular Jack
 (2) D:DIP Straight
 (3) 0606:6P6C
 (4) K:Insulator Color Black
 (5) E:With Panel Stop
 (6) XX:Contact Finish
 01:Gold Flash Over All,Over Nickel
 06:Gold Plated 6u" Over All,Over Nickel
 15:Gold Plated 15u" Over All,Over Nickel
 30:Gold Plated 30u" Over All,Over Nickel
 (7) H:RoHS Compliant

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

PART No.

CHECKED BY

HZF

DRAWING No.

DRAWING BY

SONG

SCALE


NONE

REV.

A2

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	12/03/2012
△A1		Modify Data	HZF	04/14/2011
△A0		NEW RELEASE	HZF	12/30/2007