
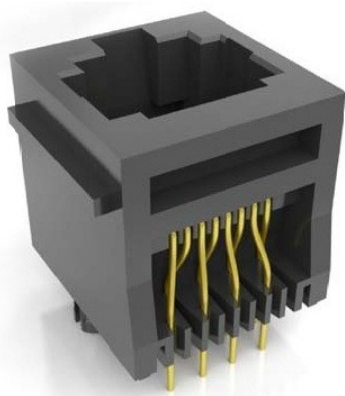
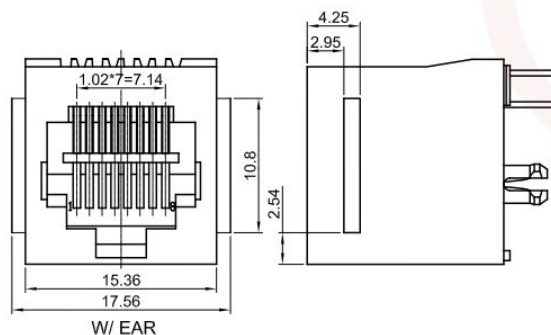
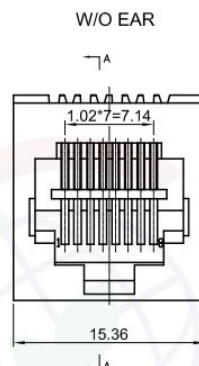
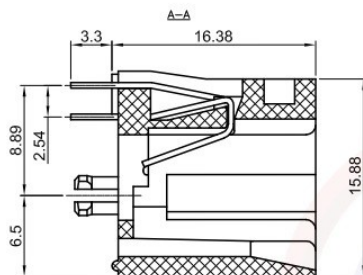


Recommend PCB Layout(Tolerance=±0.05)

Notes:

1. Electrical Characteristics:
 - 1.1 Contact Resistance: 30mΩ Max.
 - 1.2 Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - 1.3 Insulation Resistance: 500MΩ Min.
 - 1.4 Current Rating: 1.5A.
 - 1.5 Voltage Rating: 125V AC rms.
2. Environment Characteristics:
 - 2.1 Temperature: -40°C~+85°C.
3. Materials:
 - 3.1 Contact Material: Copper Alloy.
 - 3.2 Contact Plating: Gold Plating Over Nickel.
 - 3.3 Insulator Materials: PBT, UL94-V0.
4. Product Number Code:

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB Jack 8 Positions W/O Shell V/T Type
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE				CUSTOMER			
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		MJP-0808X7					



太聯事業股份有限公司

AUK CONTRACTORS CO., LTD.