


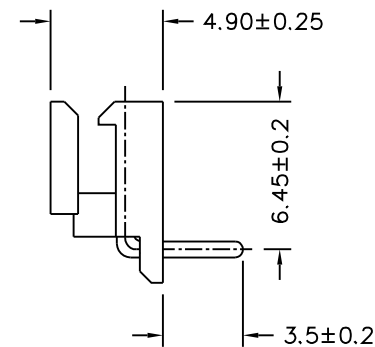
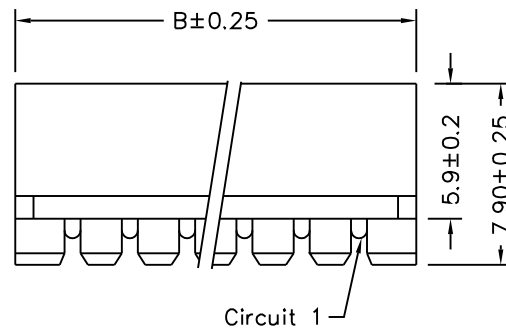


Specifications

Current Rating : 3A AC DC
Voltage Rating : 250V AC DC
Temperature Range ; -25°C to +85°C
Contact Resistance : 20mΩ max.
Insulation Resistance : 1000MΩ Min.
Withstanding Voltage : 800V AC/minute
Material : Nylon 66, UL 94V-0
Pin Material : Brass, Tin Plated

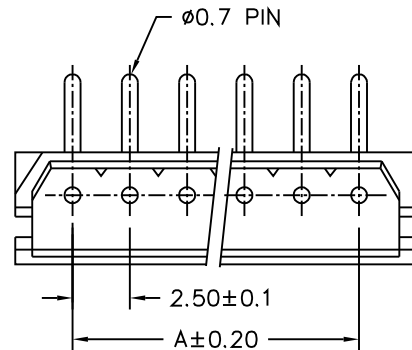

P.C.B Layout



Circuits	Dimensions	
	A	B
2P	2.50	7.50
3P	5.00	10.0
4P	7.50	12.5
5P	10.0	15.0
6P	12.5	17.5
7P	15.0	20.0
8P	17.5	22.5
9P	20.0	25.0
10P	22.5	27.5
11P	25.0	30.0
12P	27.5	32.5
13P	30.0	35.0
14P	32.5	37.5
15P	35.0	40.0



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

Wafer

APPROVED BY

MEI

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

PART No.

MWXXR

CHECKED BY

LHC

DRAWING No.

MWXXR

DRAWING BY

HXY

SCALE

NONE

REV.

A0

UNIT
mm

AREA

REVISIONS

CHK

DATE