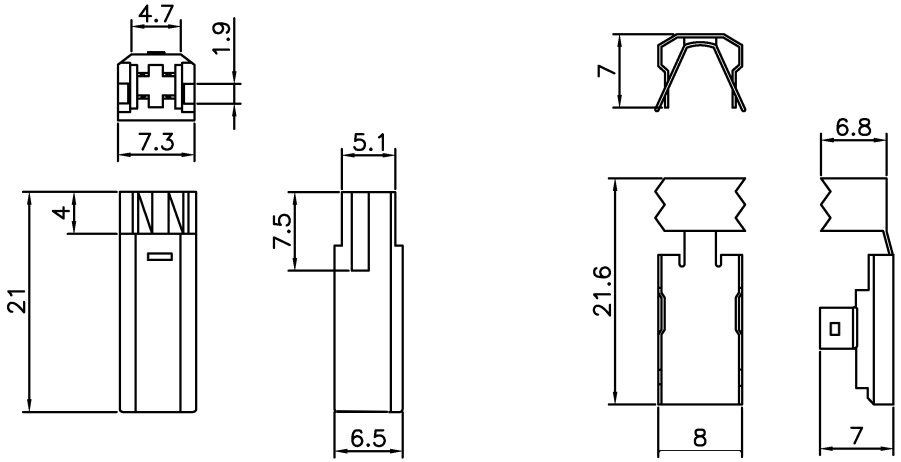

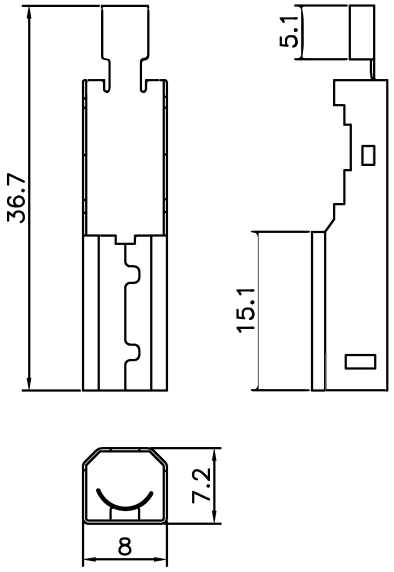

NOTES:

1. SPECIFICATIONS
   - . Contact Resistance: 30mΩ max
   - . Insulator Resistance: 1000MΩ min.
   - . Current Rating: 30V DC 1.5 A max
   - . Dielectric withstanding voltage: AC500V For 1 minute
   - . Contact: Copper alloy
   - . Housing: PBT.

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60 .X ±0.38 .XX ±0.25	X. ±5° .X ±3° .XX ±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	USB-B MALE SOLDER
UNITS	mm		
SHEET SIZE	A4	SERIES	

USB1108