



## Wafer VHxxD Pitch 3.96 mm Male Wire to Board connector

### Provides connection assurance

The positive-locking latch has a clear, audible click.

### Electrical & Mechanical Specifications

Item	Specification
Wafer Material	Nylon 66, UL94V-0
Pin / Position Material	Brass bronze
Plating	Tin-plated, $\geq 50 \mu\text{m}$
Insulation Resistance	1000 M $\Omega$ (min.)
Withstand Voltage	1500 V AC / 1 minute
Current Rating	5 A AC / DC
Voltage Rating	250 V AC / DC

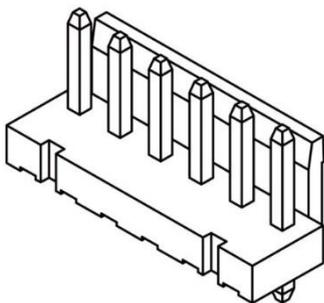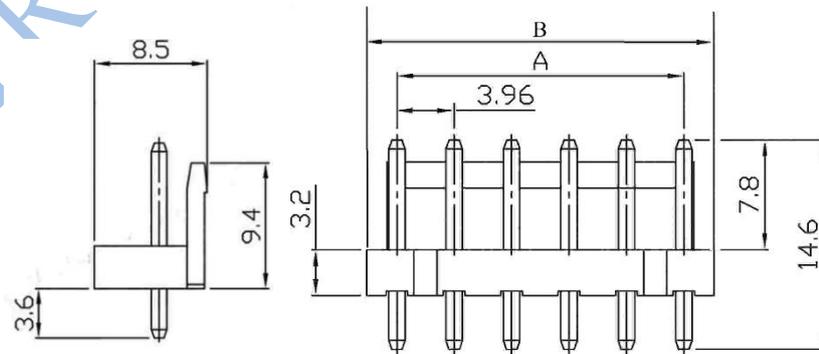

Part No.	Circuits	Dim A	Dim B
VH02D	2	5.3	7.92
VH03D	3	9.26	11.88
VH04D	4	13.22	15.84
VH05D	5	17.18	19.8
VH06D	6	21.14	23.76
VH07D	7	25.1	27.72
VH08D	8	29.06	31.68
VH09D	9	33.02	35.64
VH10D	10	36.98	39.6
VH11D	11	40.94	43.56
VH12D	12	44.9	47.52
VH13D	13	48.86	51.48