

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 07/07/07'		





(N-1)*3.81+4.6±0.2
(N-1)*3.50+4.3±0.2

• MATERIAL
SCREWS: M2 STEEL ZINC PLATED
WIRE GUARD: PHOSPHOR BRONZE NI PLATED
CONTACT : BRASS NI PLATED
HOUSING : PA66, UL94V-0

• ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 8A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC2000V/1Min²
WIRE RANGE: 28-16AWG 1.5mm

• MECHANICAL
TEMP. RANGE : -40℃~+105℃
MAX SOLDERING : +250℃, FOR 5 SEC.
TORQUE: 0.2Nm (1.71b.in)
STRIP LENGTH : 6-7mm
PRODUCT NUMBER CODE:
KF2EDG-3.5/3.81 X X X X


CONTACTS TYPE
V-STRAIGHT TYPE
HOUSING COLOR
B:BLACK G:GREEN
CONTACT PLATING
N:NICKEL O:GOLD FLASH
CONNECTOR TYPE
S:SOCKET
No. OF CONTACTS
02 03 04 05
06 07 08 16

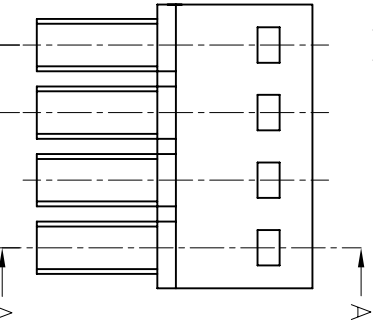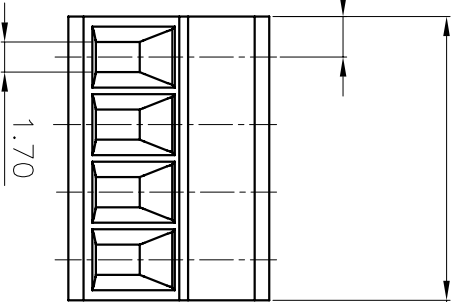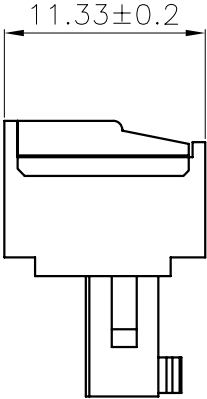

SECTION A-A

(N-1)*3.81
3.50
(N-1)*3.50

N:NUMBER OF CONTACTS

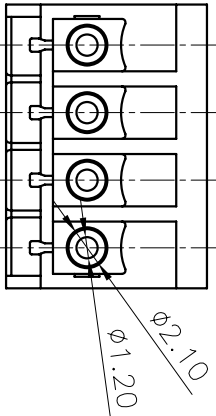

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	EURO TERMINAL BLOCKS	
X.	±0.60	X.	±5°	UNITS		PITCH 3.50,3.81mm	
.X	±0.38	.X	±3°	mm			
.XX	±0.25	.XX	±2°	SHEET SIZE	A4	SERIES	KF2EDG-3.5 KF2EDG-3.81 SERIES
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	KF2EDG-3.5/3.81-XXXXX						