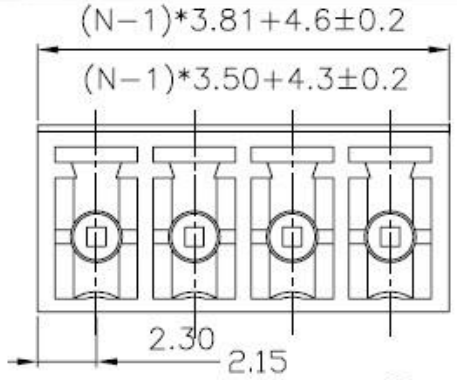

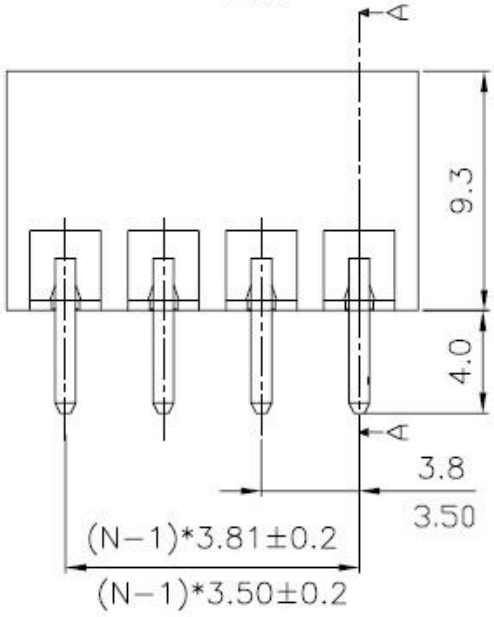

N:NUMBER OF CONTACTS

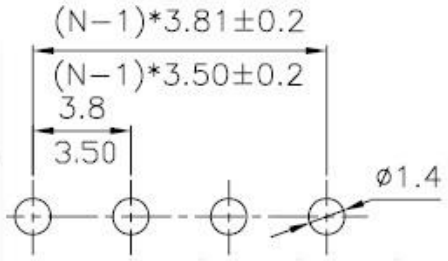

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Poles	A	B
2	3.50	7.80
3	7.00	11.30
4	10.50	14.80
5	14.00	18.30
6	17.50	21.80
7	21.00	25.30
8	24.50	28.80
9	28.00	32.30
10	31.50	35.80
11	35.00	39.30
12	38.50	42.80
13	42.00	46.30
14	45.50	49.80
15	49.00	53.30
16	52.50	56.80
17	56.00	60.30
18	59.50	63.80
19	63.00	67.30
20	66.50	70.80
21	70.00	74.30
22	73.50	77.80
23	77.00	81.30
24	80.50	84.80

DESCRIPTION	DRAWN
NEW RELEASE	LJH 07/08/07'

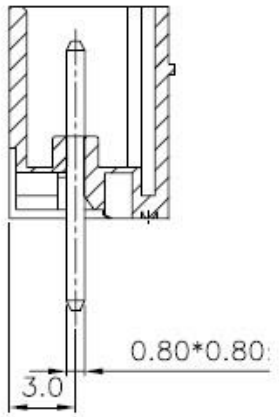

- MATERIAL
  PIN HEADER : BRASS, TIN PLATED
  HOUSING : PA66, UL94V−0
- ELECTRICAL
  RATED VOLTAGE : 300V
  RATED CURRENT : 8A
  CONTACT RESISTANCE : 20mΩ
  INSULATION RESISTANCE : 5000MΩ/1000V
  WITHSTANDING VOLTAGE : AC2000V/1Min
- MECHANICAL
  TEMP.RANGE : −40℃≤+130℃
  MAX SOLDERING : +250℃, FOR 5 SEC.

KF2EDGCV-3.5/3.81-xx-xxp

1 2

1: xxx color
Black,Blue,Green,Red,
Gray,Orange,White

2: xx-- 2-24poles

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	PLUGGABLE TERMINAL BLOCKS
UNITS	mm		
SHEET SIZE	A4	SERIES	