

KF332 PIN Header For Pluggable Terminal

Technical Specifications

MATERIAL

PIN HEADER: BRASS TIN PLATED

HOUSING : PA66, UL94V-0

ELECTRICAL

RATED VOLTAGE: 300V

RATED CURRENT: 10A

CONTACT RESISTANCE: 20mΩ




INSULATION RESISTANCE: 5000MΩ / 1000V

WITHSTANDING VOLTAGE: AC1500V / 1 Min

MECHANICAL

TEMP. RANGE: -30°C ~ +105°C

MAX SOLDERING: +250°C, FOR 5 SEC

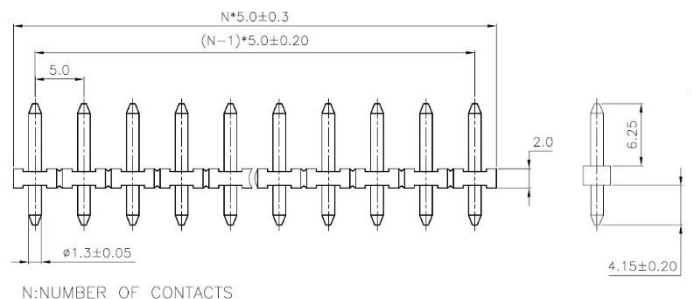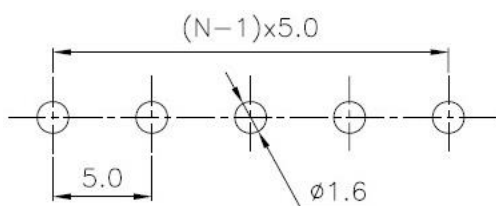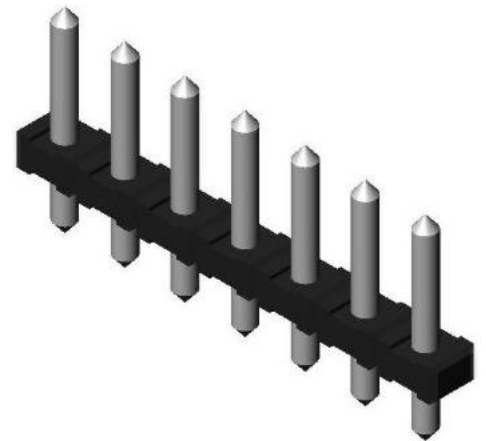

N: NUMBER OF CONTACTS